



SERVPRO of North Rensselaer & South Washington Co's

Servpro of N. Rensselaer & S. Washington Co's
PO Box 442, Cambridge, NY 12816
PH: (518) 677-3444
FX: (518) 677-3534
office@servpro10299.com
EIN# 331194479

Insured: Town of Arlington
Property: 3828 Vermont Rte 7a
Arlington, NY 05250

Home: (802) 379-9916

Estimator: Emily Bradley
Position: Senior Auditor
Company: SERVPRO

Business: (518) 677-3444
E-mail: ebradley@servpro10299.com

Claim Number:

Policy Number:

Type of Loss:

Date of Loss:
Date Inspected:

Date Received:
Date Entered: 7/2/2026 1:37 PM

Price List: VTRU8X_JUL26
Restoration/Service/Remodel
Estimate: TOWNOFARLINGTON



SERVPRO of North Rensselaer & South Washington Co's


Servpro of N. Rensselaer & S. Washington Co's
 PO Box 442, Cambridge, NY 12816
 PH: (518) 677-3444
 FX: (518) 677-3534
 office@servpro10299.com
 EIN# 331194479

TOWNOFARLINGTON

Main Level

Stairs


Height: 8'



388.00 SF Walls	88.58 SF Ceiling
476.58 SF Walls & Ceiling	88.58 SF Floor
9.84 SY Flooring	47.67 LF Floor Perimeter
52.67 LF Ceil. Perimeter	

Door	2' 6" X 6' 8"		Opens into Exterior		
Door	2' 6" X 6' 8"		Opens into Exterior		
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
26. Apply anti-microbial agent to more than the floor	282.58 SF	0.00	0.32	0.00	90.43
27. Clean floor - Heavy	88.58 SF	0.00	0.77	0.00	68.21
29. Clean handrail - wall mounted	26.00 LF	0.00	0.71	0.00	18.46
31. Clean stair riser - per side - per LF	42.00 LF	0.00	0.72	0.00	30.24
32. Clean stair tread - per side - per LF	39.00 LF	0.00	0.88	0.00	34.32
33. Clean part of the walls	194.00 SF	0.00	0.47	0.00	91.18
Totals: Stairs				0.00	332.84
Total: Main Level				0.00	332.84

Level 2



Attic

Height: Peaked

509.39 SF Walls	2,464.46 SF Ceiling
2,973.85 SF Walls & Ceiling	2,105.14 SF Floor
233.90 SY Flooring	186.50 LF Floor Perimeter
199.59 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
19. Apply anti-microbial agent to more than the floor	4,569.60 SF	0.00	0.32	0.00	1,462.27
20. Apply biological cleaning agent (spore-based) to the floor	2,105.14 SF	0.00	0.34	0.00	715.75



SERVPRO of North Rensselaer & South Washington Co's

Servpro of N. Rensselaer & S. Washington Co's
 PO Box 442, Cambridge, NY 12816
 PH: (518) 677-3444
 FX: (518) 677-3534
 office@servpro10299.com
 EIN# 331194479


CONTINUED - Attic

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
37. Tear out non-salv underlayment & bag - Category 3 water	2,105.14 SF	2.70	0.00	0.00	5,683.88
24. HEPA Vacuuming exposed framing w/ sheathing - Floor	2,105.14 SF	0.00	2.11	0.00	4,441.85
25. Tear out and bag wet insulation in confined space - Cat 3	2,105.14 SF	2.30	0.00	0.00	4,841.82
34. Hazardous Waste/Mold Cleaning Technician - per hour hauling out misc debris	16.00 HR	0.00	73.64	0.00	1,178.24
Totals: Attic				0.00	18,323.81
Total: Level 2				0.00	18,323.81

Level 3

Lower Attic

Height: 8'



624.00 SF Walls	252.47 SF Ceiling
876.47 SF Walls & Ceiling	252.47 SF Floor
28.05 SY Flooring	78.00 LF Floor Perimeter
78.00 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
15. Apply anti-microbial agent to the floor	252.47 SF	0.00	0.32	0.00	80.79
16. Apply biological cleaning agent (spore-based) to the floor	252.47 SF	0.00	0.34	0.00	85.84
17. HEPA Vacuuming exposed framing w/ sheathing - Floor	252.47 SF	0.00	2.11	0.00	532.71
18. Tear out and bag wet insulation in confined space - Cat 3	252.47 SF	2.30	0.00	0.00	580.68
Totals: Lower Attic				0.00	1,280.02
Total: Level 3				0.00	1,280.02

Job



SERVPRO of North Rensselaer & South Washington Co's

Servpro of N. Rensselaer & S. Washington Co's
PO Box 442, Cambridge, NY 12816
PH: (518) 677-3444
FX: (518) 677-3534
office@servpro10299.com
EIN# 331194479

CONTINUED - Job

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
8. Add for HEPA filter (for negative air exhaust fan)	0.25 EA	0.00	210.18	0.00	52.55
10. Add for personal protective equipment (hazardous cleanup)	12.00 EA	0.00	21.06	0.00	252.72
11. Dumpster load - Approx. 20 yards, 4 tons of debris	2.00 EA	1,122.00	0.00	0.00	2,244.00
12. Personal protective gloves - Disposable (per pair)	5.00 EA	0.00	0.39	0.00	1.95
13. Respirator - Half face - multi-purpose resp. (per day)	14.00 DA	0.00	1.67	0.00	23.38
14. Respirator cartridge - organic vapor & acid gas (per pair)	1.00 EA	0.00	28.70	0.00	28.70
38. Add for personal protective equipment - Heavy duty	40.00 EA	0.00	50.86	0.00	2,034.40
Totals: Job				0.00	4,637.70

Labor Minimums Applied

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
28. Floor cleaning labor minimum	1.00 EA	0.00	104.93	0.00	104.93
Totals: Labor Minimums Applied				0.00	104.93
Line Item Totals: TOWNOFARLINGTON				0.00	24,679.30

Grand Total Areas:

1,521.39 SF Walls	2,805.51 SF Ceiling	4,326.90 SF Walls and Ceiling
2,446.19 SF Floor	271.80 SY Flooring	312.17 LF Floor Perimeter
0.00 SF Long Wall	0.00 SF Short Wall	330.25 LF Ceil. Perimeter
2,446.19 Floor Area	2,553.24 Total Area	1,521.39 Interior Wall Area
1,867.42 Exterior Wall Area	325.17 Exterior Perimeter of Walls	
0.00 Surface Area	0.00 Number of Squares	0.00 Total Perimeter Length
0.00 Total Ridge Length	0.00 Total Hip Length	




SERVPRO of North Rensselaer & South Washington Co's

Servpro of N. Rensselaer & S. Washington Co's
PO Box 442, Cambridge, NY 12816
PH: (518) 677-3444
FX: (518) 677-3534
office@servpro10299.com
EIN# 331194479

Summary for Dwelling

Line Item Total	24,679.30
Replacement Cost Value	\$24,679.30
Net Claim	\$24,679.30

Emily Bradley
Senior Auditor

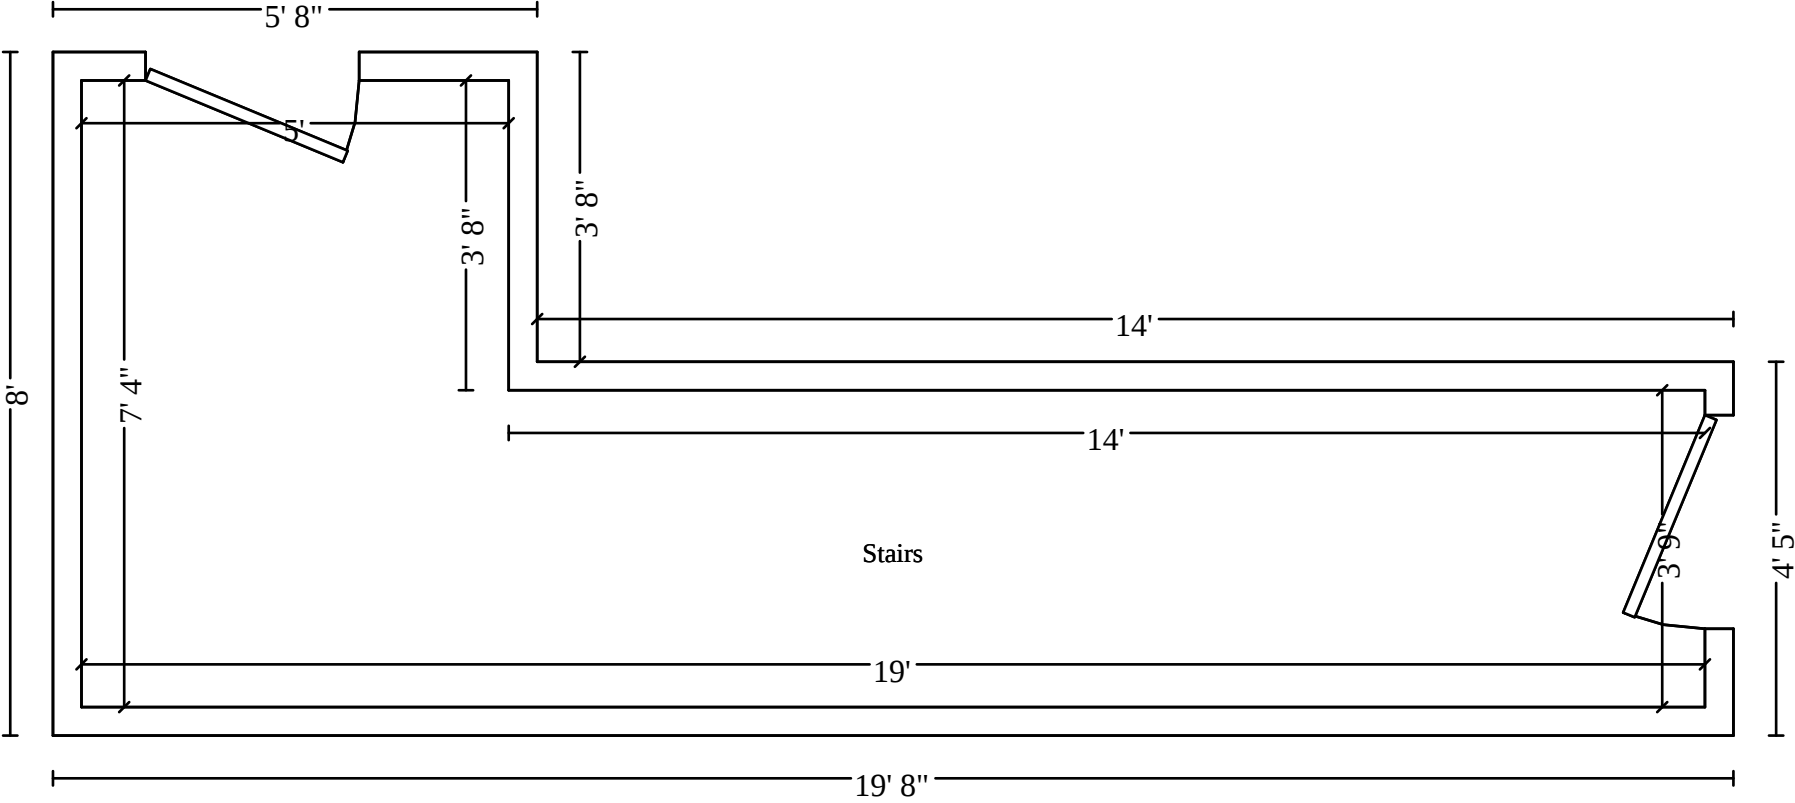

Main Level

