

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$328,139.00	
Service Items	\$12,122.00	
Total Factory List Price Including Options:		\$340,261.00
Total Goods Purchased:		\$2,875.00
Special P&D \$2,000.00	\$2,000.00	
Total Preparation And Delivery:		\$2,000.00
Freight	\$3,850.00	
Total Freight:		\$3,850.00
Total Factory List Price Including Freight:		\$348,986.00
Less Customer Allowance:		(\$170,516.00)
Total Vehicle Price:		\$178,470.00
Total Warranty: <i>ALLISON 5 YEAR WARRANTY</i>		\$1,380.00
Total Sale Price:		\$179,850.00
Total Per Vehicle Sales Price:		\$179,850.00
Net Sales Price:		\$179,850.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

 Official Title and Date

 Firm or Business Name

 Authorized Signature

 Authorized Signature and Date

This proposal is not binding upon the seller without
 Seller's Authorized Signature

 Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.


The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

July 24, 2026

Prepared For:
Town of Arlington
MARK ROBINSON
3828 VT Rte 7A
Arlington, VT 05250-
(802)375 - 2332
Reference ID: N/A

Presented By:
H. L. GAGE SALES, INC.
Jeff Prince
121 WASHINGTON AVE EXTENSION
ALBANY NY 12205 -
(518)456-8871

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

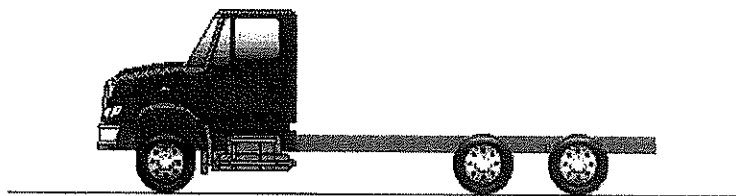

SOURCEWELL

Model Profile 2027 HV615 SBA (HV615)

AXLE CONFIG:	6X4
APPLICATION:	Front Plow and Wing with Spreader
MISSION:	Requested GVWR: 66000. Calc. GVWR: 66000. Calc. GCWR: 140000 Calc. Start / Grade Ability: 48.79% / 3.26% @ 55 MPH Calc. Geared Speed: 77.2 MPH
DIMENSION:	Wheelbase: 199.00, CA: 130.00, Axle to Frame: 71.00
ENGINE, DIESEL:	{International S13} EPA 2024, 515HP @ 1800 RPM, 1850 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 515 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4700 RDS} 6th Generation Controls, 7 Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway, with Two Speed Reverse
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 4.89
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L XZU-S2 (MICHELIN), 488 rev/mile, 65 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range H XDN2 (MICHELIN), 497 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Chalmers 854-46H} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with (8) Torque Rods, Restrictor Bars
PAINT:	Cab schematic 100WX Location 1: 2303, Red (Std) Chassis schematic N/A

Vehicle Specifications
2027 HV615 SBA (HV615)

July 24, 2026

<u>Code</u>	<u>Description</u>
HV61500	Base Chassis, Model HV615 SBA with 199.00 Wheelbase, 130.00 CA, and 71.00 Axle to Frame.
1AND	AXLE CONFIGURATION 6x4
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CGE	FRAME RAILS Heat Treated Alloy Steel (125,000 PSI Yield); 11.25" x 4.00" x 0.500" (285.75mm x 101.6mm x 12.7mm); 480.8" (1221.2mm) Maximum OAL
1LNR	BUMPER, FRONT Swept Back, Steel, Painted 0001 Canyon Black, Heavy Duty
1MEJ	FRAME DIMPLE Dimple on Left and Right Top Flange of Frame Rail to Reference Rear Axle Centerline
1WBC	CROSSMEMBER, SUSPENSION (1) 7-Piece Steel in lieu of (1) Double Dogbone, Forward
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille
1WHP	WHEELBASE RANGE 183" (465cm) Through and Including 248" (630cm)
1WMA	CROSSMEMBER, INTERMEDIATE (1) 5-Piece in lieu of Each Single Dogbone with 4x2 & 4x4 Chassis; Each Double Dogbone with 6x4, 6x6 & 8x6 Tridem Chassis
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
3AHU	SUSPENSION, FRONT, SPRING Multi-Stage Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers
3WAJ	SPRINGS, FRONT AUXILIARY Air Bag, Right Side Only, Driver Control
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
4619	TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck
	<u>Notes</u> : When electronic stability control is ordered with trailer connections on a 4x2 truck, please check the operator manual for trailer weight restrictions.
4AZV	AIR BRAKE ABS {Bendix AntiLock Brake System} 6-Channel (6 Sensor/6 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control
4EDL	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 120 psi Cut-In/140 psi Cut-Out, Integrated PuraGuard Coalescing Filtration
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Sqn Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 Sqn
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic
4LGR	SLACK ADJUSTER PINS Stainless Steel Slack Adjuster Pins/Cotter Pins on Front and Rear
4SPT	AIR COMPRESSOR {Bendix ESS 380} 16.8 CFM, Head Unload

Vehicle Specifications
2027 HV615 SBA (HV615)

July 24, 2026

Code	Description
4VGA	AIR DRYER LOCATION Mounted Outside Right Rail, Forward of Front Wheel
4VGM	AIR TANK Polished Aluminum, with Straight Thread O-Ring Ports
4VMA	AIR TANK LOCATION (2) Vertically Stacked, Outside Right Rail, Under Cab in Front of Aftertreatment Box, Perpendicular to Rail
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes
4WDW	BRAKE CHAMBERS, POSITION on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)
4WRU	AIR COMPRESSOR DISCHARGE LINE 1/2" ID to 5/8" ID Teflon Hose, with Stainless Steel Braid; to Air Dryer
4WXR	DRAIN VALVE (2) (Berg) with Pull Chains, for Air Tanks
4XDR	BRAKES, REAR (Meritor 16.5X7 Q-PLUS CAST) Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle
4XDT	BRAKES, FRONT (Meritor 16.5X6 Q-PLUS CAST) Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type
5708	STEERING COLUMN Tilting
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PSE	STEERING GEAR (2) (TRW THP60/RCH60) Dual Power
5WBJ	POWER STEERING HOSE Stainless Steel Steering Lines
6DGU	DRIVELINE SYSTEM (Dana Spicer) SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4
7BEU	AFTERTREATMENT COVER Aluminum
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side
7SDZ	ENGINE COMPRESSION BRAKE (International) for S13 Engines, with Selector Switch and On/Off Switch
7WBA	TAIL PIPE (1) Turnback Type, Bright
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel
7WDM	EXHAUST HEIGHT 10'
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	Includes
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8540	HORN, ELECTRIC (2) Trumpet Style

<u>Code</u>	<u>Description</u>
8695	SNOW SHIELD (2) Chrome; for Dual Air Horns
8899	JUMP START STUD (2) 12V, Remote Mounted
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8HXT	HORN, AIR (2) Single Tone, Chrome, Roof Mounted, with Lanyard Pull Cord
8MRR	BATTERY SYSTEM {Energys Odyssey 31-PC2150 AGM} Maintenance-Free, (3) AGM 12-Volt 3450CCA Total, Top Threaded Stud
8RGA	2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab
8RMZ	SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars
8RNB	CB RADIO Accommodation Package, Header Mounted, Feeds from Accessory Side of Ignition Switch, Includes Power Source, One Antenna and Antenna Base with Wiring on Left Side Mirror
8RPR	ANTENNA for Increased Roof Clearance Applications
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8TME	TRAILER CONNECTION SOCKET (Phillips) 7-Way, Mounted at Rear of Frame, Wired for Turn Signals Independent of Stop, Compatible with Trailers with Amber or Side Turn Lamps
8WDG	BACK-UP ALARM {Preco 1059} Electronic; Solid State, Dual Function, 112 dBA
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WZP	INDICATOR, BATTERY WARNING Green BATTERY ON Indicator, Mounted on Left Side of Instrument Panel, To be Used with Factory Installed or Customer Mounted Battery Disconnect Switch
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XDZ	BATTERY BOX Steel, 2-3 Battery Capacity, Mounted Inside the Cab, Under Passenger Seat
8XJE	TURN SIGNALS, FRONT Dual Face, LED, Amber/Amber, Mounted on Top of Fender, Used with Standard Flush Mounted Front Turn Signal, Side Marker Lamps, Parking Lights and Reflectors
8XKC	HEADLIGHTS Halogen, with Daytime Running Lights, Automatic Twilight Controlled
8XMB	CONNECTOR, DASH, CENTER PANEL Cab Wiring for TMC RP1226 Vehicle Accessory Connector; Includes 14-pin Connector with Switched Power, Battery Power, Ignition Power, Ground & Body 250K Datalink, Connector Located Behind Instrument Panel Center Console
8XNG	STARTING MOTOR (Mitsubishi Electric Automotive America DP60) 12-Volt
8XRB	BATTERY DISCONNECT SWITCH for Cab Power Disconnect, Disconnects Power Distribution Module (PDM) and Body Builder Through Solenoid, Does Not Disconnect Charging Circuits, In-Cab Mounted Switch
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9ANG	HOOD, HATCH (01) for Servicing
9HDD	GRILLE Stationary, Chrome Vertical Accent Bars, Chrome Surround

<u>Code</u>	<u>Description</u>
9WAC	BUG SCREEN Mounted Behind Grille
9WBM	FRONT END Tilting, Fiberglass, with Three Piece Construction, Sloped Front
10028	CHASSIS COATING Extreme Corrosion Resistant Galvanized and Painted Finish, for Single Frame Rails
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WN"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan
10JPA	CUSTOMER IDENTITY for Sourcewell
10SLV	PROMOTIONAL PACKAGE Government Silver Package
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12850	PTO EFFECTS, ENGINE FRONT for N13/A26/S13 Engines, Less PTO, Unit, Includes Adapter Plate on Engine Front Mounted
12884	BLOCK HEATER, ENGINE (Phillips) 120V/1500W
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
12BGX	ENGINE, DIESEL (International S13) EPA 2024, 515HP @ 1800 RPM, 1850 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 515 Peak HP (Max)
12TAB	POWERTRAIN INTERFACE MODULE
12THT	FAN DRIVE (Horton Drivemaster) Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u> : FAN Nylon
12VCG	AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control, Engine Mounted
12VKJ	EMISSION, CALENDAR YEAR (International S13) EPA, OBD and GHG Certified for Calendar Year 2026
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use
12WGA	HOSE CLAMPS, RADIATOR HOSES , Mechanical Type; with Constant-Tension Functionality
12WPZ	OIL PAN Stainless Steel, for N13/A26/S13 Engines
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WVH	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Door
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty
12XCY	RADIATOR Aluminum, Cross Flow, 1144 SqIn, with 1007 SqIn Charge Air Cooler

<u>Code</u>	<u>Description</u>
13BES	TRANSMISSION, AUTOMATIC (Allison 4700 RDS) 6th Generation Controls, 7 Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway, with Two Speed Reverse
13WAW	OIL COOLER, TRANSMISSION (Modline) Water to Oil Type
13WEH	AUTOMATIC NEUTRAL Allison Transmission Shifts to Neutral When Parking Brake is Engaged and Remains in Neutral When Parking Brake is Disengaged, without On/Off Switch
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints
13WUS	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Package Number 223, Modified for Single Input Auto Neutral
13WVW	NEUTRAL AT STOP OMIT
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab
13WYU	SHIFT CONTROL PARAMETERS (Allison) 3000 or 4000 Series Transmissions, Performance Programming
13XAA	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission
14862	PDL WARNING BUZZER Power Divider Lock
14HRE	AXLE, REAR, TANDEM (Meritor RT-46-164P) Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 4.89
14UZU	SUSPENSION, REAR, TANDEM (Chalmers 854-46H) Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with (8) Torque Rods, Restrictor Cans
14WBN	DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash
14WBU	SHOCK ABSORBERS, REAR (4) for Chalmers Suspension Only, Mounted from Frame to Beam
14WZY	AXLE SHAFT MODIFICATION Axle Shaft Flanges Modified for 0.625" Diameter Drive Studs with Solid Type Cone-Locks
15924	FUEL TANK STRAPS Bright Finish Stainless Steel
15LNZ	FUEL HEATER PLUMBING Plumbing for Blender Valve Integrated in Fuel Water Separator, Thermostatically Controlled, for S13 Engine
15LPU	FUEL/WATER SEPARATOR (Racor 8600) Pre-Filter and Filter Base, Includes Water-in-Fuel Sensor
15LRE	LOCATION FUEL/WATER SEPARATOR Mounted Under Hood, Left Side, Above Front Axle
15SJZ	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 80 US Gal (303L), Mounted Left Side, Under Cab
15WEZ	DEF TANK 18 US Gal (68L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
16564	HEATER SHUT-OFF VALVES (1) Ball Valve Type, Supply Line
16ATC	AUTOMATIC CLIMATE CONTROL Automatically Maintains Cabin Comfort Based on Selected Temperature
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer
	<u>Includes</u>

<u>Code</u>	<u>Description</u>
	: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for
	: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure
	: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission
16HGN	GAUGE, AIR APPLICATION
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16KGA	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Seat Back Angle Adjust, Dual Shocks
16SDZ	MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} (2) Right and Left Side, Bright, 7.5" Sq.
16SGH	GRAB HANDLE, EXTERIOR (2) Chrome, for Cab Entry, (1) Towel Bar Type, with Anti-Slip Rubber Inserts Mounted Left Side at B-Pillar, (1) Towel Bar Type Mounted Right Side on Vertical Exhaust
16SMY	SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Vinyl, for use with Batteries in Cab
16SNU	MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Bright Heads, Black Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width
	<u>Notes</u>
	: Mirror Dimensions are Rounded to the Nearest 0.5"
16SNX	MIRROR, CONVEX, LOOK DOWN Right Side, Bright, 6" x 10.5"
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab
	<u>Includes</u>
	: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger
	: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Reading Lights; Integral to Overhead Console, Center Mounted
	: SUN VISOR (3) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side
16VLU	CAB REAR SUSPENSION Air Suspension, for High Cab Height
16VLV	MONITOR, TIRE PRESSURE Omit
16VSL	WINDSHIELD Heated, Single Piece
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood
16XJP	INSTRUMENT PANEL Wing Panel
16XRX	MODESTY PANEL Painted

Code	Description
16XWD	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color, with Integral Clearance/Marker Lights
16XWJ	WINDSHIELD WIPER BLADES Winter Type
16XXW	SHIELD, FRESH AIR INTAKE for Snow and/or Debris
16ZJA	ACCESS, CAB Aluminum, Self-Cleaning, Open and Serrated Design, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab, Extended Cab or Sleeper Cab
16ZPK	FLOOR, COATING Protective Coating, Applied to Interior Cab Floor
27DUR	WHEELS, FRONT {Accuride 41730} DISC; 22.5x9.00 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DWR	WHEELS, REAR {Accuride 43644} DUAL DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
29PBS	COATING IDENTITY, REAR WHEELS {Accuride Accu-Shield} Disc Rear Wheels, Aluminum, with Vendor Applied Clear Coat, Not for Super Single/Wide Base
29PBT	COATING IDENTITY, FRONT WHEELS {Accuride Accu-Shield} Disc Front Wheels, Aluminum, with Vendor Applied Clear Coat, Not for Wide Base
29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil
60ADT	BDY INTG, REMOTE POWER MODULE Mounted Inside Cab Behind Driver Seat, Up to 12 Inputs (6 Analog & 6 Tri-State) and 17 Outputs (6 High Current, Max 20 amp per Channel, 6 Low Current, 2 PWM, (2) 5A, (1) 5VR), Max 100 amp Total, Includes One Switch Pack with Momentary Switches
7482133264	(8) TIRE, REAR 11R22.5 Load Range H XDN2 (MICHELIN), 497 rev/mile, 75 MPH, Drive
7682543212	(2) TIRE, FRONT 315/80R22.5 Load Range L XZU-S2 (MICHELIN), 488 rev/mile, 65 MPH, All-Position

Services Section:

40127	WARRANTY Standard for HV513/HV515, HV613/HV615 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2030A
40J68	SRV CONTRACT, EXT ENGINE/AFTR {International} To 60-Month/100,000 Miles (160,000 km), Includes Engine, Engine Electronics, Turbocharger, Water Pump and Fuel Injectors, Aftertreatment Coverage for International S13 Engines GREATER THAN 500HP
40XBS	SRV CONTRACT, EXT COOLING SYS {International} To 60-Month/100,000 Miles (160,000 km)
40XES	SRV CONTRACT, EXT MAJOR COMP {International Prepackaged Components} To 60-Month/100,000 Miles (160,000 km), Includes Front Axle, Rear Axle, and Propshaft, for Rear Axle Rating of 52,000 lbs or less

Program truck and reset jake, road speed and shut down. \$2,875.00